

Midwest Tank Company
 17368 197th Avenue
 Big Lake, MN 55309 US
 Tel: 763.263.0747
 Fax: 763.263.0748
 Email: info@midwesttankco.com


Item # BBT-30 x 36, Boiler Blowdown Tanks

For boiler pressures up to 400 lbs. use 100 lb. ASME tanks.

These boiler blow-off tanks are built and labeled in accordance with the ASME Code and comply in all respects with the requirements set forth in the State of Minnesota Code for pressure vessels.

Minimum shell thickness is 3/8" and a wear plate of thickness equal to that of the shell is installed opposite the inlet opening.

Tanks are furnished with legs, manhole, openings for 1/2" pressure gage, 1/2" gage glass, 3/4" thermometer and other fittings. Tanks are painted one shop coat of prime paint unless specified otherwise.

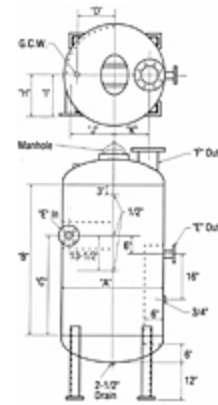

[Specifications](#) · [Tank Size Chart](#) · [Tank Size](#)

Specifications

| | |
|----------------------|--------|
| Min. Shell Thickness | 3/8 in |
|----------------------|--------|

Tank Size Chart

| | |
|---------------|-------------|
| Tank Size | 30 x 36 in |
| Boiler Rating | 26 to 50 hp |

Tank Size

| | |
|----------|-----------|
| Dim. (A) | 30 in |
| Dim. (B) | 36 in |
| Dim. (C) | 26 in |
| Dim. (D) | 11 in |
| Dim. (E) | 2 in |
| Dim. (F) | 5 in |
| Dim. (G) | 1 in |
| Dim. (H) | 14 in |
| Dim. (J) | 13 1/4 in |
| Dim. (K) | 11 in |

